

A&D Medical ...Clearly a Better Value

BLOOD PRESSURE MONITOR UA-767PBT-Ci



The UA-767PBT-Ci Digital Blood Pressure Monitor is based on the UA-767Plus, which has been clinically proven in accuracy. It has inherited the advanced features from the original model and is equipped with wireless transmission, giving it extended capability. With automatic cuff inflation, one-button operation, and a large display, this monitor is easy to use. This home blood pressure monitor communicates with hubs, smart phones, tablets, and Continua certified devices through Bluetooth. The UA-767PBT-Ci can send real-time communication data of blood pressure measurements to Access Points immediately. These devices can also operate in a batch-mode to send up to 200 measurements with time and date stamp through a single command.

The PBT-Ci family of products boasts updated Class I Bluetooth technology (Ver. 2.1) which allows improved connectivity through secure simple pairing (SSP). This device can operate in various profiles (e.g. Serial Port Profile (SPP), Health Device Profile (HDP) and gives you the choice between master or slave mode operation. System integrators are even provided enhanced data with measurement status (e.g. low battery, irregular heartbeat, etc).


For questions about A&D products, call us toll free at 1-888-726-9966 and a specially trained representative will assist you, or visit us at www.andmedical.com.



- Class 1 Bluetooth
- Clinically Validated
- Irregular Heartbeat indicator
- Includes cuff
- One button operation
- Large 3-line display
- 200 measurement memory

BLOOD PRESSURE MONITOR UA-767PBT-Ci

PART NUMBER	UPC NUMBER	DESCRIPTION
UA-767PBT-Ci	5-060006-58119	Blood Pressure Monitor
UA-279	0-93764-01154-2	Small Cuff: 6.3" - 9.4" (16 - 24 cm)
UA-280	0-93764-04607-0	Medium Cuff: 9.4" - 14.2" (24 - 36 cm)
UA-281	0-93764-01069-9	Large Cuff: 14.2" - 17.7" (36 - 45 cm)
TB:233	0-93764-60235-1	AC Adapter

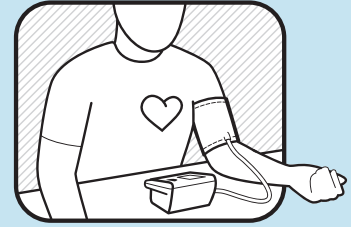

Technical Specifications

Dimensions	4.3" (d) x 5.8" (w) x 2.5" (h) / 110 mm (d) x 147 mm (w) x 64 mm (h)
Weight	10.6 oz. (300 g) without batteries
Display	Digital, 20 mm character height, Pressure / pulse displayed simultaneously
Pressurization	Automatic, using micropump
Deflation	Active exhaust valve
Type	Oscillometric
Accuracy	Pressure: ± 3 mmHg or $\pm 2\%$, whichever is greater; Pulse: $\pm 5\%$
Pressure Range	Pressure: 20 mmHg to 280 mmHg; Pulse: 40 pulses to 180 pulses
Power Source	4 type "AA" (1.5 volt) alkaline batteries (included) or 120 V AC adapter (optional)
Battery Life	Approximately 4 months with one daily measurement
Operating Environment	50°F to 104°F (10°C to 40°C); Less than 85% relative humidity
Storage Environment	14°F to 140°F (-10°C to 60°C); Less than 95% relative humidity

Packaging and Shipping Specifications

Selling Unit (Box)	Dimensions (L x W x H)	Weight	Individual Item Cube (cubic feet)
UA-767PBT-Ci	3.2 x 1.0 x 6.25 in	1.45 lb	0.01
Unit Case (10 units)	Dimensions (W x D x H)	Weight	Case Cube (cubic feet)
UA-767PBT-Ci	20.87 x 11.4 x 9.0 in	16.3 lb	1.24



Continua
HEALTH ALLIANCE



1756 Automation Parkway
San Jose, CA 95131
www.andmedical.com

©2013 A&D Medical. All rights reserved.

Ask your A&D Medical Sales Representative about other A&D Medical products.

- Blood Pressure Monitors
- Digital Thermometers
- Personal Scales
- Activity Monitors

For questions about A&D products, call us toll free at 1-888-726-9966 and a specially trained representative will assist you, or visit us at www.andmedical.com.